


S SERIES

S Series Thermal Transfer Overprinter

Intermittent and continuous combined in one

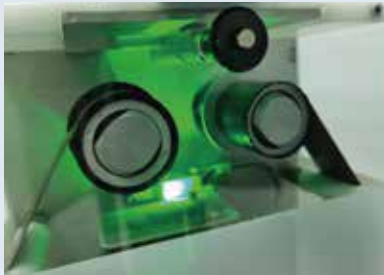

Dual motor ribbon drive technology

- * Easy ribbon loading
- * Consistent ribbon print gap, optimized ribbon usage
- * Consistent ribbon tension throughout the entire roll

Powerful software

- * UI comes with create and edit function
- * Option to use PC as an UI
- * Customizable print function



Modular design

- * Simple structure, stable performance
- * Electric model
- * Easy in maintenance, minimal servicing

Technical References

Model	S32A
Print Area	Int.:32x60mm;Con.:32x120mm
Print Head	32mm 300DPI
Print Speed	Int.: Max400mm/s;Con.:Max.600mm/s
Print Frequency	Max.300 cycles/min
Ribbon Size	33mm x 450M
	*Max 600m,more sizes and colors available
Print Gap	0.5mm and adjustable
Software Interface	RS232 industrial port/USB transfer/Real-time data transfer
Hardware Interface	Input:print trigger,encoder
	Output:Print/Fault
User Interface	Warning and Error indication Job file creation/Self Diagnostic Industrial PC/Color touch screen with USB ports
Print Body Features	Multiple Langage Input Real date and time/Best before date/Expiry date Image rotation/Font Selection/Logo/Serial numbering Customized Code/Random 2D code/Barcode/Shift code
Weight	Appr. 5.0KG
Size	L180mm x H180mm x W160mm
Power/Air Supply	90~240 VAC No compressed air
Operating Environment	Temperature:0~40 °C Humidity:0~90%

*Only the length of customized ribbon reaches to Max.600M



上海研捷机电设备有限公司
Shanghai Yanjie Technology Co.,Ltd

Shanghai Contact:

Tel:+86-21-62829208

Fax:+86-21-62829209

Email:marketing@yanjietech.com

Overseas Contact:

Tel:+65-82007786

Email:dickson.chan@yanjietech.com

